



LOCAL MOTOR CONTROL PANEL FOR SYSTEM 3

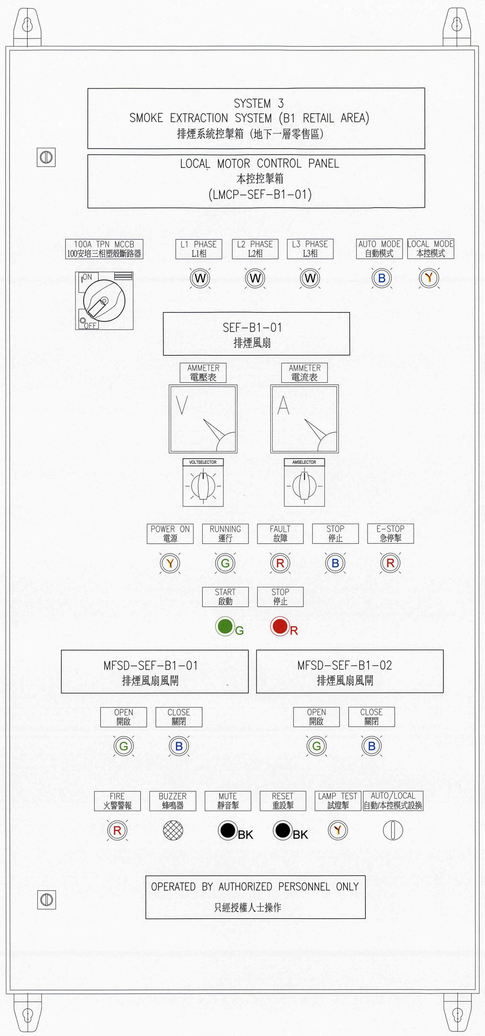

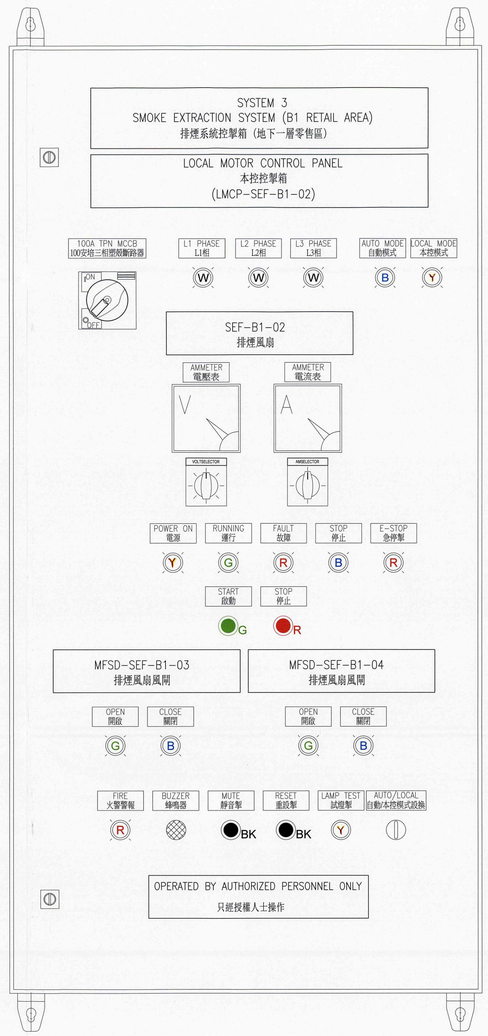

LOCAL MOTOR CONTROL PANEL FOR SMOKE EXTRACTION SYSTEM
FOR B1 RETAIL AREA (N.T.S.)

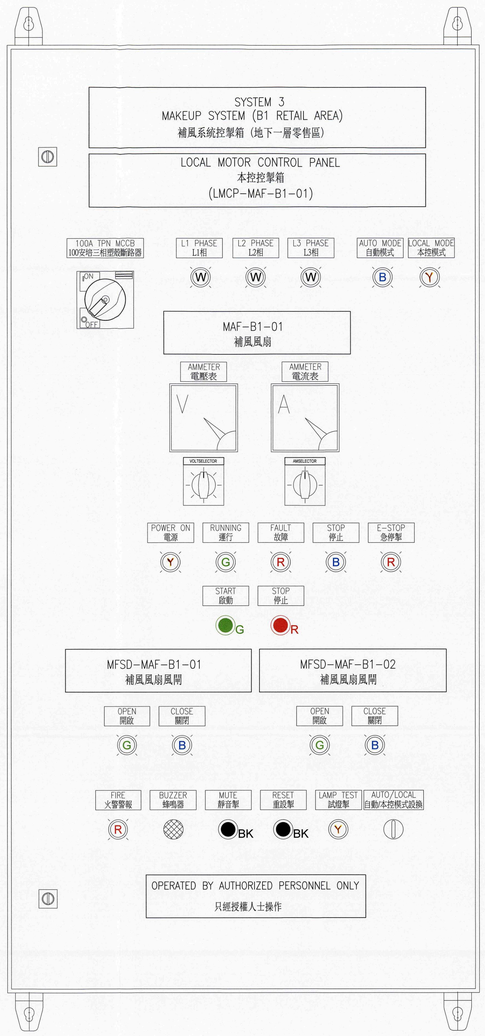

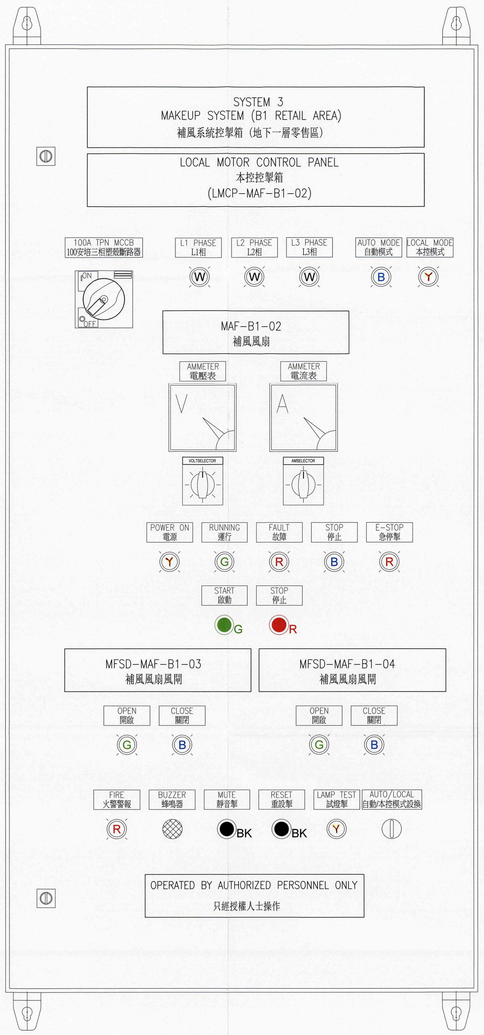

LOCAL MOTOR CONTROL PANEL FOR SMOKE EXTRACTION SYSTEM
FOR B1 RETAIL AREA (N.T.S.)

NOTES:

1. VISUAL AND AUDIO ALARM AT SUPERVISORY CONTROL PANEL WILL BE "ON" ONCE THE MANUAL OVERRIDE BUTTON PROVIDED ON SUPERVISORY CONTROL PANEL IS PUSHED.
2. "AUTO/LOCAL" SWITCH PROVIDED ON FAN LOCAL MOTOR CONTROL PANEL (LMCP) IS LOCKED IN "AUTO" POSITION. THE VISUAL AND AUDIO ALARM ON THE RESPECTIVE FAN AT SUPERVISORY CONTROL PANEL WILL BE "ON" ONCE "AUTO/LOCAL" SWITCH AT LMCP IS IN "LOCAL" POSITION.
3. THE MANUAL OVERRIDE SWITCH ON THE SUPERVISORY CONTROL PANEL WILL NOT HAVE CONTROL TO THE CORRESPONDING FAN WHICH HAS BEEN SWITCHED TO "LOCAL" POSITION IN THE LMCP OR MOTOR EMERGENCY STOP BUTTOM IS PUSHED EVEN RECEIPT OF THE FIRE SIGNAL.
4. THE CONTROL PANEL SHALL BE CONSTRUCTED TO BSEN60439 WITH 2.0MM THICK.
5. ALL SWITCHES AND INDICATORS SHALL BE CLEARLY LABELLED (RED LETTERS ON WHITE BACKGROUND, NOT LESS THAN 3 MM HIGH) TO SHOW OPERATING POSITIONS AND SYSTEMS SERVED.
6. A FURTHER LABEL SHALL BE PROVIDED WITH LETTERS NOT LESS THAN 6 MM HIGH STATING THAT THE CONTROLS SHALL BE OPERATED BY AUTHORISED PERSONNEL.
7. ALL LABELS SHALL BE PERMANENT, LEGIBLE AND FIRMLY SECURED (ADHESIVE IS NOT SATISFACTORY) AND SHALL BE LETTERED IN BOTH ENGLISH AND CHINESE BY ENGRAVING OR SIMILAR.

LEGEND:

- (X) INDICATION LAMP
  "X" DENOTED COLOUR AS FOLLOWS:
  G – GREEN
  R – RED
  Y – YELLOW
  B – BLUE
- ●X PUSH BUTTON
  "X" DENOTED COLOUR AS FOLLOWS:
  G – GREEN
  R – RED
  Y – YELLOW
  BK – BLACK
- (E) MANUAL OVERRIDE BUTTON (MANUAL RESET TYPE)
- BUZZER
- KEY SELECTOR (LOCKED IN AUTO MODE)
- KEY LOCK
- V DIGITAL MULTI-FUNCTION POWER METER
- A AMMETER
- MOLDED CASE CIRCUIT BREAKER

FIRE SERVICE INSTALLATION PLANS AS CERTIFIED BY THE AUTHORIZED PERSON AND FIRE SERVICE INSTALLATION CONTRACTOR / CONSULTANT
Date 08 SEP 2026
Signed (FUNG Kam-wah)
for Director of Fire Services

LOO Kwan Wai
(RPE No.: RP0260258)

NO.	DATE	REVISIONS	DRAFTED	CHECKED	DESIGNED	REVIEWED
A	09/2025	FSD SECOND SUBMISSION	HYH	WWC	HYH	TKL
0	05/2025	FSD FIRST SUBMISSION	HYH	WWC	HYH	TKL

CLIENT:

NATION STAR DEVELOPMENT LIMITED
75/F, 8 Finance Street,
Central, Hong Kong

PROJECT ARCHITECT & AUTHORIZED PERSON:

RONALD LU & PARTNERS
呂元祥建築師事務所
33rd Floor, Wu Chung house, 213 Queen's Road East,
Wanchai, Hong Kong

STRUCTURAL/GEOTECHNICAL:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

BUILDING SERVICES ENGINEER:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

QUANTITY SURVEYOR:

ARCADIS
17/F, Two Harbour Square, 180 Wai Yip Street,
Kwun Tong, Kowloon
Hong Kong

FIRE SERVICES CONTRACTOR:

開創工程有限公司
GRAND CREATIVE ENGINEERS LIMITED

PROJECT:

PROPOSED DEVELOPMENT AT BAILEY STREET & WING KWONG STREET, TO KWA WAN, KOWLOON
INLAND LOT NO. 11279
(URA PROJECT KC-009)

TITLE:

SMOKE EXTRACTION SYSTEM-
LOCAL MOTOR CONTROL
PANEL DIAGRAM (3 OF 3)

DATE: 06/2026		SCALE: NTS@A0	
DRAFTED: HYH	CHECKED: WWC	DESIGNED: HYH	REVIEWED: TKL
JOB NO. 2503373A	DRAWING NO. 2503373A/SES/106		REV. NO. A

9