PIPING MATERIALS SCHEDULE

PIPE SIZE	SPECIFICATION
15MM DIA TO 150 MM DIA. (ABOVE GROUND) & 50MM TO 80MM PIPEWORK CONNECTING THE GOVERNMENT MAINS TO WATER TANKS	GALVANIZED STEEL PIPE TO BS EN 10255 MEDIUM GRADE OR ABOVE
15MM DIA. TO 150MM DIA. (UNDER GROUND) & 100MM TO 150MM PIPEWORK CONNECTING THE GOVERNMENT MAINS TO WATER TANKS	DUCTILE IRON PIPE TO BS EN 545 CLASS K12 (FOR UNDERGROUND PIPEWORK SHALL BE PAINTED WITH ONE COAT OF BITUMEN PAINT AND WRAPPED WITH TWO LAYERS OF DENSO TAPE ON COMPLETION)
200MM DIA. & ABOVE (ABOVE GROUND & BELOW GROUND) & PIPEWORK CONNECTING THE GOVERNMENT MAINS TO WATER TANKS	DUCTILE IRON PIPE TO BS EN 545 CLASS K12 (FOR UNDERGROUND PIPEWORK SHALL BE PAINTED WITH ONE COAT OF BITUMEN PAINT AND WRAPPED WITH TWO LAYERS OF DENSO TAPE ON COMPLETION)
*ALL PIPEWORK, FITTINGS, VALVES, PUMPS AND ALL OTHER EQUIPMENT INCLUDED IN THE COMPLETED INSTALLATION SHALL HAVE WORKING PRESSURE OF NOT LESS THAN 150% SYSTEM PRESSURE.	

METER SCHEDULE

SYSTEM	LOCATION	METER SIZE (DIA.)	METER TYPE (DESTINATION)
SPR	B1/F (WATER METER CABINET NEAR SPRINKLER WATER TANK & PUMP ROOM (FOR TOWER 5))	100MM	100MM CHECK METER (TO PODIUM AND TOWER 2 SPR TANK)

PUMP SCHEDULE

SYSTEM	PUMP	SERVICE AREA	LOCATION	DESIGNATION	CAPACITY (L/MIN)	HYDRAULIC HEAD (M)	NOS. OF UNIT	TYPE OF PUMP	MOTOR SPEED (REV/MIN)	MOTOR STARTER	MOTOR RATING (KW)	REAUGKS
SPRINKLER	SPRINKLER PUMP	FOR BASEMENT, PODIUM & TOWER 2	SPRINKLER WATER TANK & PUMP ROOM (FOR PODIUM AND TOWER 2) AT B1/F	SP-PT2-01 SP-PT2-02	Z1(H) 3100/1350/1100	86/125/128	2	CENTRIFUGAL HORIZONTAL MULTI-STAGE MULTI-OUTLET	2900	AUTO-TRANSFORMER	132	ONE DUTY ONE STANDBY
					Z2(M) 3100/1350/1100	47/87/90						
					Z3(L) 3100/1350/1100	25/59/62						
	SPRINKLER JOCKEY PUMP			SJP-PT2-01 SJP-PT2-02 SJP-PT2-03	60	135	3	CENTRIFUGAL VERTICAL MULTI-STAGE	2900	STAR DELTA	4	THREE DUTY
					60	100				DIRECT-ON-LINE	3	
					60	72				DIRECT-ON-LINE	2.2	

TANK SCHEDULE

SYSTEM	WATER TANK	CAPACITY (M^3)	SERVICE AREA	LOCATION	MATERIAL
SPRINKLER	SPRINKLER WATER TANK	124	FOR PODIUM, BASEMENT AND TOWER 2	SPRINKLER WATER TANK & PUMP ROOM (FOR PODIUM AND TOWER 2) AT B1/F	REINFORCED CONCRETE

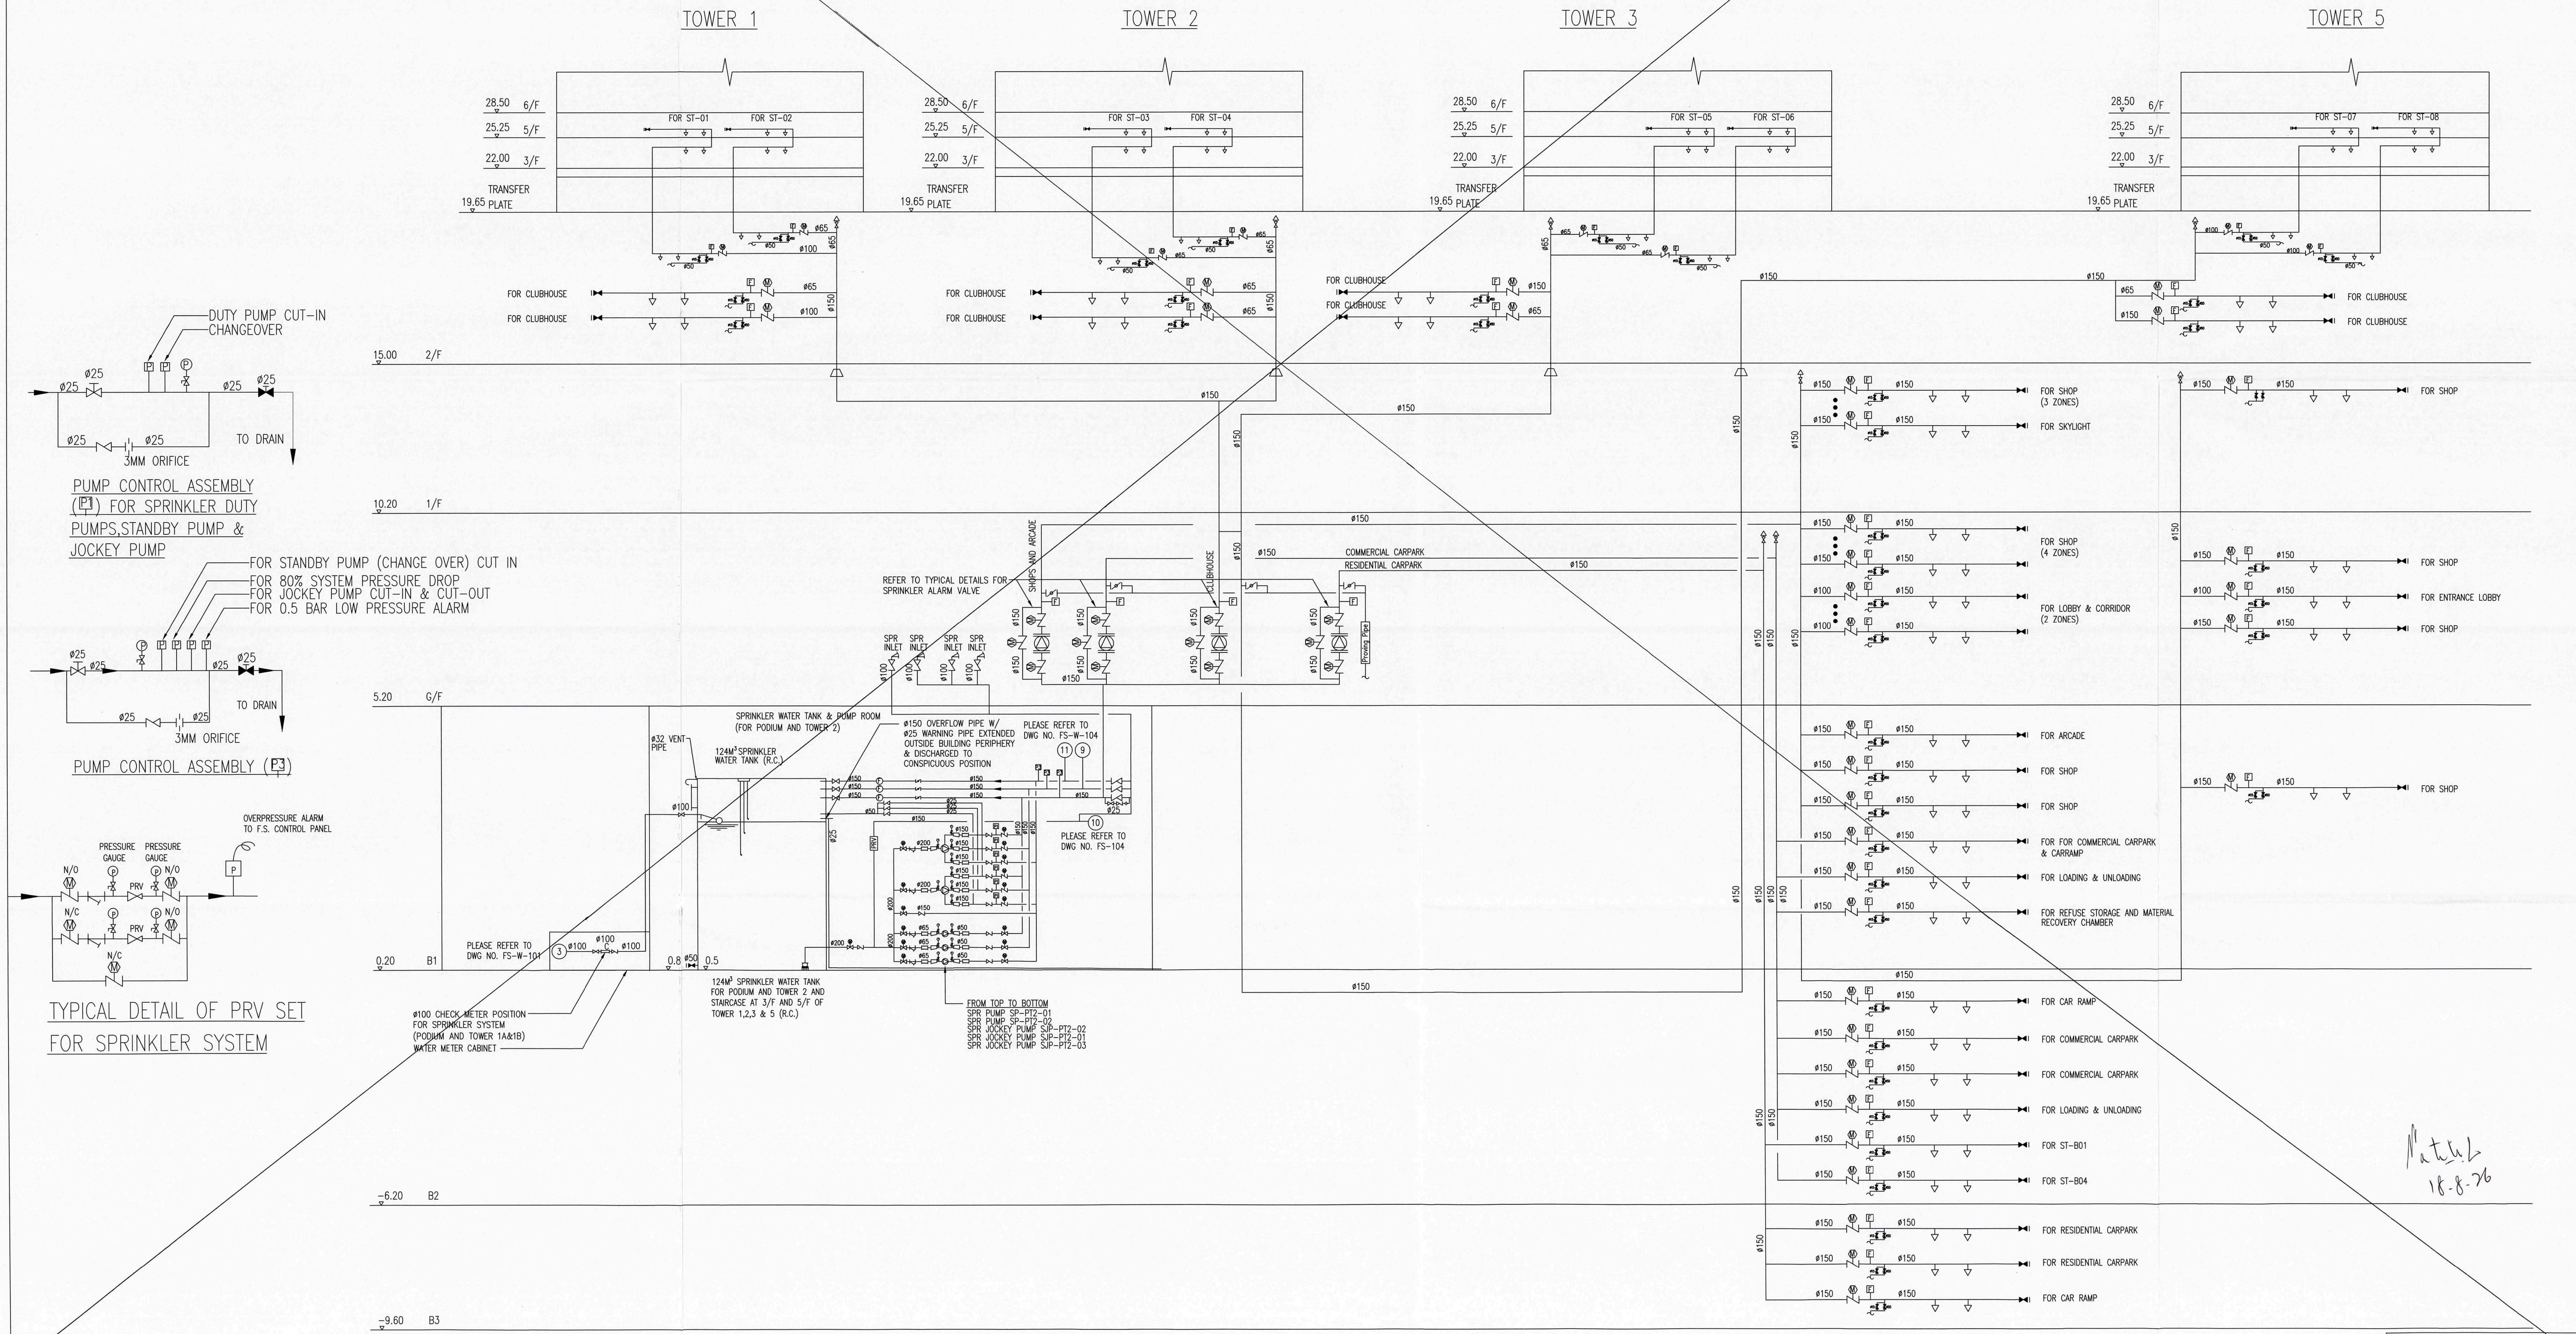
TOWER 1
TOWER 2
TOWER 3
TOWER 5
28.50 6/F
25.25 5/F
22.00 3/F
19.65 TRANSFER PLATE
FOR ST-01
FOR ST-02
FOR ST-03
FOR ST-04
FOR ST-05
FOR ST-06
FOR ST-07
FOR ST-08
FOR CLUBHOUSE
15.00 2/F
10.20 1/F
5.20 G/F
0.20 B1
-6.20 B2
-9.60 B3
ø150
ø100
ø65
ø50
ø25
ø200
FOR SHOP (3 ZONES)
FOR SKYLIGHT
FOR SHOP (4 ZONES)
FOR LOBBY & CORRIDOR (2 ZONES)
FOR SHOP
FOR ENTRANCE LOBBY
FOR ARCADE
FOR FOR COMMERCIAL CARPARK & CARRAMP
FOR LOADING & UNLOADING
FOR REFUSE STORAGE AND MATERIAL RECOVERY CHAMBER
FOR CAR RAMP
FOR COMMERCIAL CARPARK
FOR ST-B01
FOR ST-B04
FOR RESIDENTIAL CARPARK
COMMERCIAL CARPARK
RESIDENTIAL CARPARK
SHOPS AND ARCADE
CLUBHOUSE
Proving Pipe
REFER TO TYPICAL DETAILS FOR SPRINKLER ALARM VALVE
SPR INLET
SPRINKLER WATER TANK & PUMP ROOM (FOR PODIUM AND TOWER 2)
ø32 VENT PIPE
124M³ SPRINKLER WATER TANK (R.C.)
ø150 OVERFLOW PIPE W/ ø25 WARNING PIPE EXTENDED OUTSIDE BUILDING PERIPHERY & DISCHARGED TO CONSPICUOUS POSITION
PLEASE REFER TO DWG NO. FS-W-104
PLEASE REFER TO DWG NO. FS-104
PLEASE REFER TO DWG NO. FS-W-101
PRV
0.8
0.5
124M³ SPRINKLER WATER TANK FOR PODIUM AND TOWER 2 AND STAIRCASE AT 3/F AND 5/F OF TOWER 1,2,3 & 5 (R.C.)
FROM TOP TO BOTTOM
SPR PUMP SP-PT2-01
SPR PUMP SP-PT2-02
SPR JOCKEY PUMP SJP-PT2-02
SPR JOCKEY PUMP SJP-PT2-01
SPR JOCKEY PUMP SJP-PT2-03
ø100 CHECK METER POSITION FOR SPRINKLER SYSTEM (PODIUM AND TOWER 1A&1B)
WATER METER CABINET
DUTY PUMP CUT-IN
CHANGEOVER
TO DRAIN
3MM ORIFICE
FOR STANDBY PUMP (CHANGE OVER) CUT IN
FOR 80% SYSTEM PRESSURE DROP
FOR JOCKEY PUMP CUT-IN & CUT-OUT
FOR 0.5 BAR LOW PRESSURE ALARM
OVERPRESSURE ALARM TO F.S. CONTROL PANEL
PRESSURE GAUGE
N/O
N/C

PUMP CONTROL ASSEMBLY (P1) FOR SPRINKLER DUTY PUMPS,STANDBY PUMP & JOCKEY PUMP

PUMP CONTROL ASSEMBLY (P3)

TYPICAL DETAIL OF PRV SET FOR SPRINKLER SYSTEM

18-8-26

FOR INFORMATION ONLY

LOO Kwan Wai
(RPE No.: RP0260258)

NO.	DATE	REVISIONS	DRAFTED	CHECKED	DESIGNED	REVIEWED
A	06/2026	FSD THIRD SUBMISSION	HYH	WWC	HYH	TKL
0	05/2025	FSD FIRST SUBMISSION	HYH	WWC	HYH	TKL

CLIENT:

NATION STAR DEVELOPMENT LIMITED
75/F, 8 Finance Street,
Central, Hong Kong

PROJECT ARCHITECT & AUTHORIZED PERSON:

RONALD LU & PARTNERS
呂元祥建築師事務所
33rd Floor, Wu Chung house, 213 Queen's Road East,
Wanchai, Hong Kong

STRUCTURAL/GEOTECHNICAL

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

BUILDING SERVICES ENGINEER:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

QUANTITY SURVEYOR:

ARCADIS
17/F, Two Harbour Square, 180 Wai Yip Street,
Kwun Tong, Kowloon
Hong Kong

FIRE SERVICES CONTRACTOR:

開創工程有限公司
GRAND CREATIVE ENGINEERS LIMITED

PROJECT:

PROPOSED DEVELOPMENT AT BAILEY STREET & WING KWONG STREET,
TO KWA WAN, KOWLOON
INLAND LOT NO. 11279
(URA PROJECT KC-009)

TITLE:

Sprinkler System Schematic Diagram (Sheet 1 of 2)

DATE: 06/2026		SCALE: NTS@A0	
DRAFTED: HYH	CHECKED: WWC	DESIGNED: HYH	REVIEWED: TKL
JOB NO. 2503373A	DRAWING NO. FS-103		REV. NO. A

㉓