LEGEND:

(X) INDICATION LAMP
"X" DENOTED COLOUR AS FOLLOWS:
G – GREEN
R – RED
Y – AMBER
B – BLUE
W – WHITE

(X) PUSH BUTTON
"X" DENOTED COLOUR AS FOLLOWS:
G – GREEN
R – RED
Y – AMBER
B – BLUE
BK – BLACK

(E) MANUAL OVERRIDE SWITCH (MANUAL RESET TYPE)


BUZZER

KEY SELECTOR SWITCH (LOCK IN AUTO POSITION)


NAME PLATE (WHITE WITH READ ENGRAVED WORDS)

NOTES:


1. THE SUPERVISORY CONTROL PANEL FOR STAIRCASE PRESSURIZATION SHALL BE LOCATED ADJACENT TO FIRE CONTROL PANEL.
2. ALL SWITCHES AND INDICATORS SHALL BE CLEARLY LABELED (RED LETTERS ON WHITE BACKGROUND, NOT LESS THAN 3mm HIGH).
3. A FURTHER LABEL SHALL BE PROVIDED WITH LETTERS NOT LESS THAN 6mm HIGH STATING THAT THE CONTROLS SHALL BE OPERATED BY AUTHORIZED PERSONNEL.
4. ALL LABELS SHALL BE PERMANENT, LEGIBLE AND FIRMLY SECURED (ADHESIVE IS NOT SATISFACTORY) AND SHALL BE LETTERED IN BOTH ENGLISH AND CHINESE BY ENGRAVING OR SIMILAR.
5. SCHEMATIC DIAGRAM OF STAIRCASE PRESSURIZATION SYSTEMS SHALL BE PROVIDED ADJACENT TO THE SUPERVISORY CONTROL PANEL FOR STAIRCASE PRESSURIZATION SYSTEM.
7. VISUAL AND AUDIO ALARM AT SUPERVISORY CONTROL PANEL WILL BE "ON" ONCE THE MANUAL OVERRIDE BUTTON PROVIDED ON THE SUPERVISORY CONTROL PANEL IS PUSHED. THE STATUS OF THE FANS AND DAMPERS REMAIN UNCHANGED.
8. "AUTO/LOCAL" KEY SWITCH PROVIDED ON FAN LOCAL MOTOR CONTROL PANEL (LMCP) IS LOCKED IN "AUTO" POSITION. THE VISUAL AND AUDIO ALARM ON THE RESPECTIVE FAN AT THE SUPERVISORY CONTROL PANEL WILL BE "ON" ONCE "AUTO/LOCAL" SWITCH AT LMCP IS IN "LOCAL POSITION"
9. THE MANUAL OVERRIDE SWITCH ON THE SUPERVISORY CONTROL PANEL WILL NOT HAVE CONTROL TO THE CORRESPONDING FAN/MOTOR WHICH HAS BEEN SWITCHED TO "LOCAL" POSITION IN THE LMCP OR THE MOTOR EMERGENCY STOP BUTTON IS PUSHED EVEN RECEIPT OF FIRE SIGNAL.

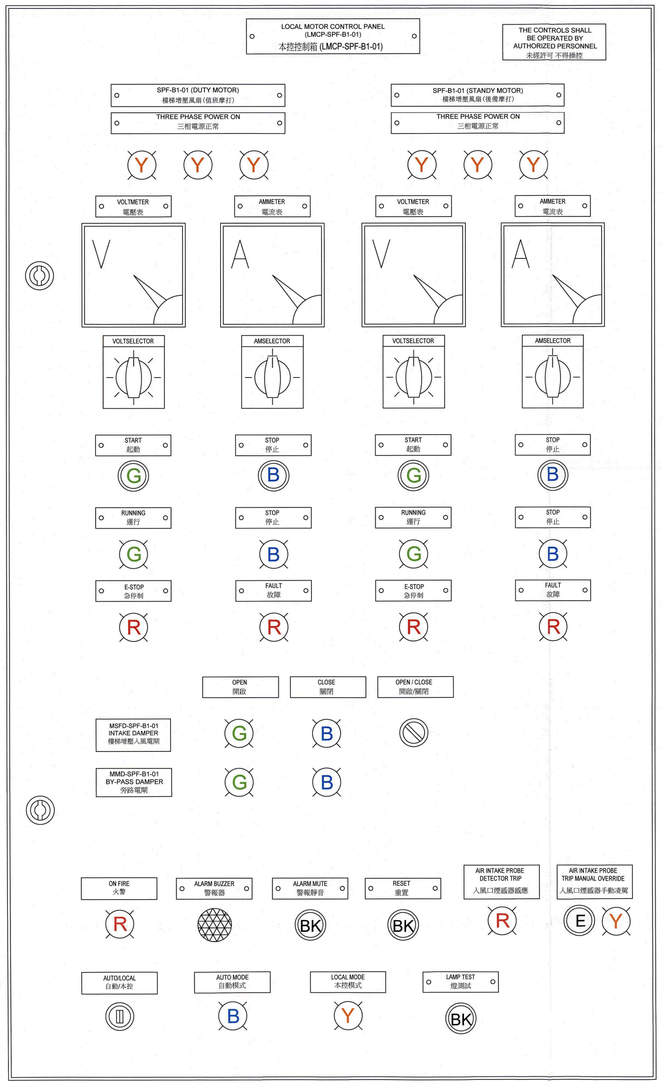

LOCAL MOTOR CONTROL PANEL FOR STAIRCASE PRESSURIZATION (LMCP-SPF-B1-01)

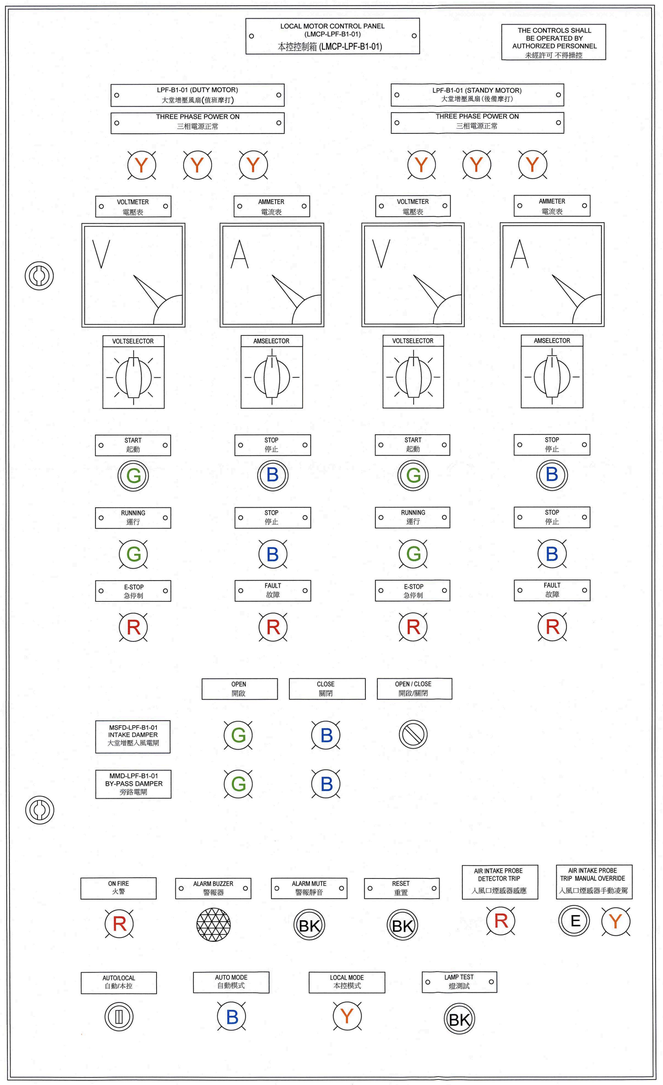

LOCAL MOTOR CONTROL PANEL FOR LIFT LOBBY PRESSURIZATION (LMCP-LPF-B1-01)

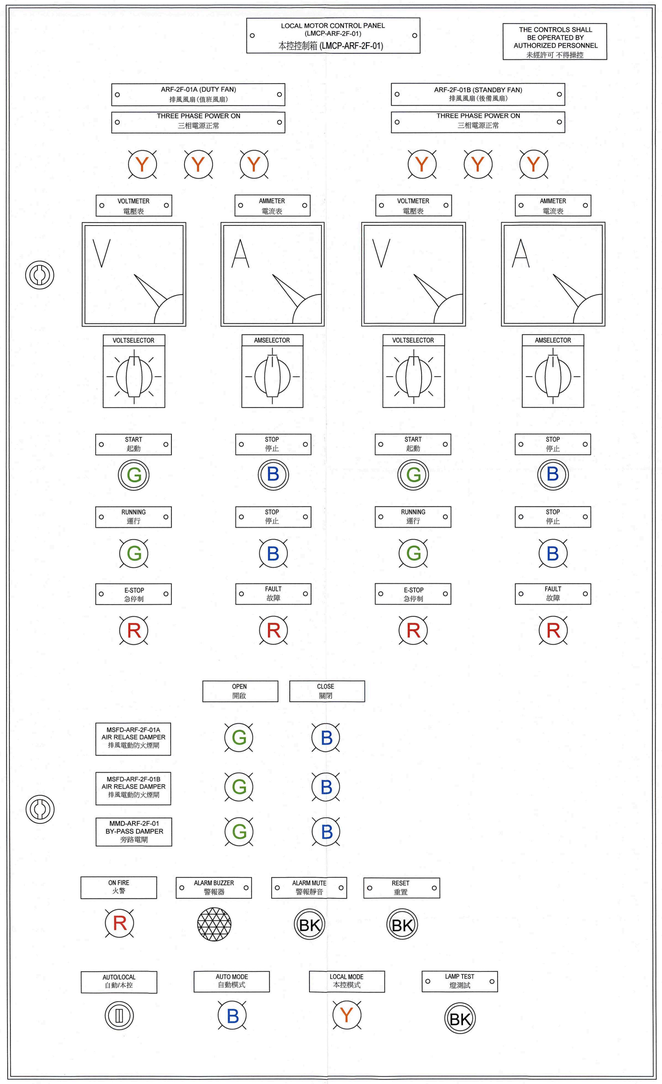

LOCAL MOTOR CONTROL PANEL FOR AIR RELEASE (LMCP-ARF-2F-01)

FIRE SERVICE INSTALLATION PLANS CERTIFIED BY THE AUTHORIZED PERSON AND FIRE SERVICE INSTALLATION CONTRACTOR / CONSULTANT
Date 27 AUG 2026
Signed (FUNG Kam-wah)
for Director of Fire Services

LOO Kwan Wai
(RPE No.: RP0260258)

NO.	DATE	REVISIONS	DRAFTED	CHECKED	DESIGNED	REVIEWED
A	07/2025	FSD SECOND SUBMISSION	HYH	WWC	HYH	TKL
0	03/2025	FSD FIRST SUBMISSION	HYH	WWC	HYH	TKL

CLIENT:

NATION STAR DEVELOPMENT LIMITED
75/F, 8 Finance Street,
Central, Hong Kong

PROJECT ARCHITECT & AUTHORIZED PERSON:

RONALD LU & PARTNERS 呂元祥建築師事務所
33rd Floor, Wu Chung house, 213 Queen's Road East,
Wanchai, Hong Kong

STRUCTURAL/GEOTECHNICAL

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

BUILDING SERVICES ENGINEER:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

QUANTITY SURVEYOR:

ARCADIS
17/F, Two Harbour Square, 180 Wai Yip Street,
Kwun Tong, Kowloon
Hong Kong

FIRE SERVICES CONTRACTOR:

開創工程有限公司
GRAND CREATIVE ENGINEERS LIMITED
CLASS I, II, & III REGISTERED FIRE SERVICES CONTRACTOR
WSD LICENSED PLUMBER I GRADE 1 2
EMSD REGISTERED ELECTRICAL CONTRACTOR
陳廣開
Chan Kwong Hoi
Director
Unit D, 2/F, Cheong Wah Comm. Bldg., 900-904 Canton Road, Kowloon.
Mobile : 9015 9598 Tel : 3612 5782 Fax : 3612 5785
Email : info@grandcreative.com.hk

PROJECT:
PROPOSED DEVELOPMENT AT BAILEY STREET & WING KWONG STREET, TO KWA WAN, KOWLOON
INLAND LOT NO. 11279
(URA PROJECT KC-009)

TITLE:
STAIRCASE PRESSURIZATION SYSTEM – FAN CONTROL PANEL FOR ST-B3

DATE: 06/2026		SCALE: NTS@A0	
DRAFTED: HYH	CHECKED: WWC	DESIGNED: HYH	REVIEWED: TKL
JOB NO. 2503373A	DRAWING NO. 2503373A/SPS/STB3/103		REV. NO. A