
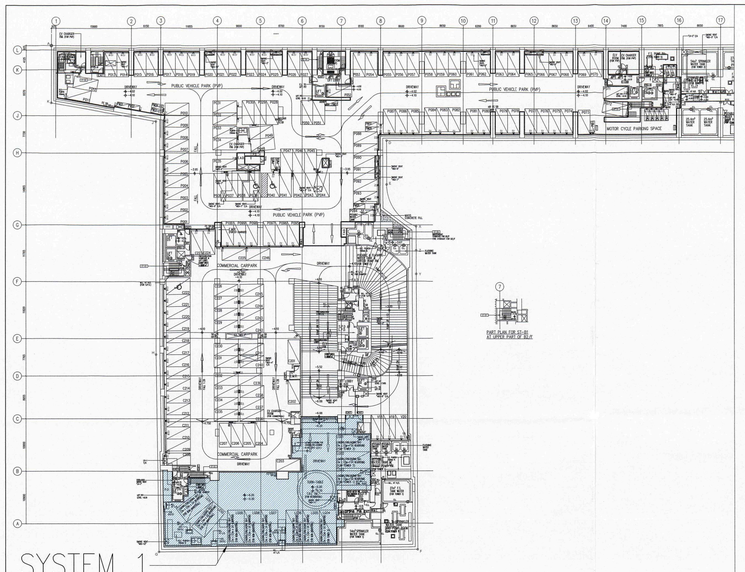



BASEMENT 2 FLOOR PLAN

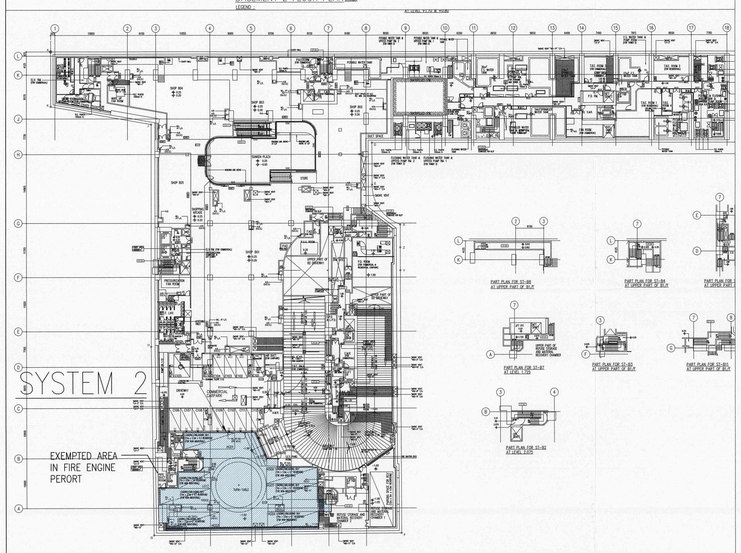

BASEMENT 1 FLOOR PLAN

LEGEND

▨ P - PINK HATCHED BLACK (UNDER LEASE)

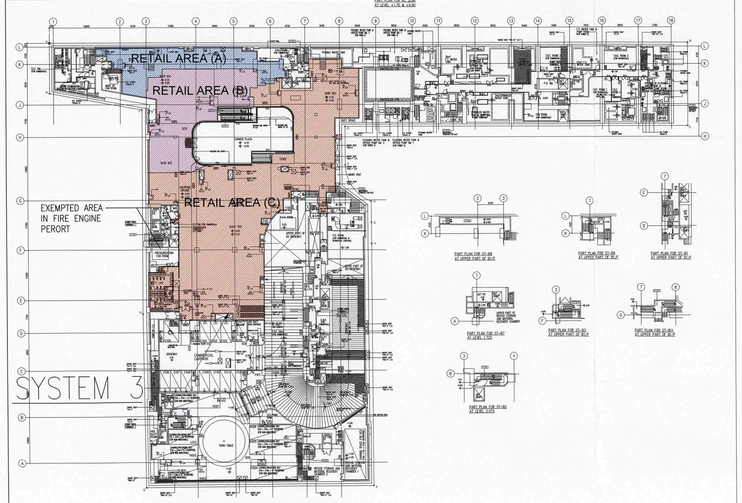

BASEMENT 1 FLOOR PLAN

LEGEND

▨ P - PINK HATCHED BLACK (UNDER LEASE)

SCHEDULE OF SMOKE EXTRACTION AND MAKE-UP RATE (SYSTEM 1)

SYSTEM AIR FLOW												SYSTEM FAN SCHEDULE			
SYSTEM	FLOOR	SERVED AREA	AREA (m^2)	HEIGHT (m)	VOLUME (m^3)	ACH	DESIGN VOLUME [1] (m^3)	MINIMUM REQUIRED SMOKE EXTRACTION RATE [2] (L/s)	PROVIDED SMOKE EXTRACTION RATE (L/s)	MINIMUM REQUIRED MAKEUP RATE [3] (L/s)	PROVIDED MAKEUP AIR RATE (L/s)	EQUIPMENT DESIGNATION IN DRAWING	FUNCTION	INSTALLATION LOCATION	PROVIDED FAN AIR FLOW RATE (L/s)
1	B2	LOADING & UNLOADING AREA	B 725.711	5.20	B 3773.697	8	7000.0	15556	15600	12480	12480	SEF-B2-01	SMOKE EXTRACTION	B2 COMMERCIAL CARPARK	7800
												SEF-B2-02	SMOKE EXTRACTION		7800
												MAF-B2-01	MAKEUP AIR SUPPLY	B2 LOADING & UNLOADING AREA	6240
												MAF-B1-03	MAKEUP AIR SUPPLY	B1 LOADING & UNLOADING AREA	6240

NOTES:
[1] THE DESIGN VOLUME SHALL BE CONSIDERED TO BE 7000 CUBIC METER (m^3) FOR ANY COMPARTMENT OF 7000 CUBIC METER (m^3) OR LESS
[2] MINIMUM REQUIRED SMOKE EXTRACTION RATE (L/s) = VOLUME X ACH / 3.6
[3] MINIMUM REQUIRED MAKEUP RATE (L/s) = VOLUME X ACH / 3.6 X 0.8

SCHEDULE OF SMOKE EXTRACTION AND MAKE-UP RATE (SYSTEM 2)


SYSTEM AIR FLOW												SYSTEM FAN SCHEDULE			
SYSTEM	FLOOR	SERVED AREA	AREA (m^2)	HEIGHT (m)	VOLUME (m^3)	ACH	DESIGN VOLUME [1] (m^3)	MINIMUM REQUIRED SMOKE EXTRACTION RATE [2] (L/s)	PROVIDED SMOKE EXTRACTION RATE (L/s)	MINIMUM REQUIRED MAKEUP RATE [3] (L/s)	PROVIDED MAKEUP AIR RATE (L/s)	EQUIPMENT DESIGNATION IN DRAWING	FUNCTION	INSTALLATION LOCATION	PROVIDED FAN AIR FLOW RATE (L/s)
2	B1	LOADING & UNLOADING AREA	599.422	6.20	3716.416	8	7000.0	15556	15600	12480	12480	SEF-B1-03	SMOKE EXTRACTION	B1 COMMERCIAL CARPARK	7800
												SEF-B1-04	SMOKE EXTRACTION		7800
												MAF-B1-05	MAKEUP AIR SUPPLY	B1 LOADING & UNLOADING AREA	6240
												MAF-B1-04	MAKEUP AIR SUPPLY		6240

NOTES:
[1] THE DESIGN VOLUME SHALL BE CONSIDERED TO BE 7000 CUBIC METER (m^3) FOR ANY COMPARTMENT OF 7000 CUBIC METER (m^3) OR LESS
[2] MINIMUM REQUIRED SMOKE EXTRACTION RATE (L/s) = VOLUME X ACH / 3.6
[3] MINIMUM REQUIRED MAKEUP RATE (L/s) = VOLUME X ACH / 3.6 X 0.8


SCHEDULE OF SMOKE EXTRACTION AND MAKE-UP RATE (SYSTEM 3)

SYSTEM AIR FLOW												SYSTEM FAN SCHEDULE			
SYSTEM	FLOOR	SERVED AREA	AREA (m^2)	HEIGHT (m)	VOLUME (m^3)	ACH	DESIGN VOLUME [1] (m^3)	MINIMUM REQUIRED SMOKE EXTRACTION RATE [2] (L/s)	PROVIDED SMOKE EXTRACTION RATE (L/s)	MINIMUM REQUIRED MAKEUP RATE [3] (L/s)	PROVIDED MAKEUP AIR RATE (L/s)	EQUIPMENT DESIGNATION IN DRAWING	FUNCTION	INSTALLATION LOCATION	PROVIDED FAN AIR FLOW RATE (L/s)
3	B1	RETAIL AREA (A) B 267.112 (NOTE 4)	267.112 (NOTE 4)	5.87 (NOTE 5)	10878.424 B	8	10878.424	24174 B	24300	19440	19440	SEF-B1-01	SMOKE EXTRACTION	B1 SMOKE EXTRACTION FAN ROOM (FOR COMMERCIAL)	12150
		RETAIL AREA (B)	401.728 (NOTE 4)	5.60 (NOTE 5)								SEF-B1-02	SMOKE EXTRACTION	B1 SHOP B01	12150
		RETAIL AREA (C) B 1412.160 (NOTE 4)	1412.160 (NOTE 4)	5.00 (NOTE 5)								MAF-B1-01	MAKEUP AIR SUPPLY	B1 MAKE UP FAN ROOM	9720
												MAF-B1-02	MAKEUP AIR SUPPLY	B1 SHOP B01	9720


NOTES:
[1] THE DESIGN VOLUME SHALL BE CONSIDERED TO BE 7000 CUBIC METER (m^3) FOR ANY COMPARTMENT OF 7000 CUBIC METER (m^3) OR LESS
[2] MINIMUM REQUIRED SMOKE EXTRACTION RATE (L/s) = VOLUME X ACH / 3.6
[3] MINIMUM REQUIRED MAKEUP RATE (L/s) = VOLUME X ACH / 3.6 X 0.8
[4] RETAIL AREA IS 2081.000 m^2 (REFER TO DRAWING NO. A/GBP/35). RETAIL AREA (A) B 267.112 + RETAIL AREA (B) 401.728 + RETAIL AREA (C) 1412.160 = 2081.000 m^2 B (MEASURED FROM GBP LAYOUT).
[5] HEIGHT REFER TO DRAWING NO. 2503373A-SES-003 FLOOR TO FLOOR ELEVATION.

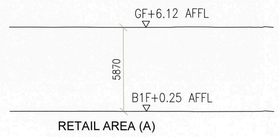

RETAIL AREA (A)

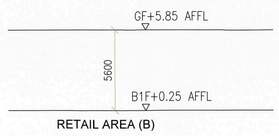

RETAIL AREA (B)

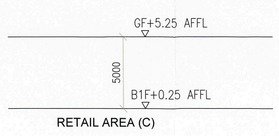

RETAIL AREA (C)

FIRE SERVICE INSTALLATION PLANS AS CERTIFIED BY THE AUTHORIZED PERSON AND FIRE SERVICE INSTALLATION CONTRACTOR / CONSULTANT
Date 08 SEP 2026
Signed (FUNG Kam-wah)
for Director of Fire Services

LOO Kwan Wai
(RPE No.: RP0260258)

NO.	DATE	REVISIONS	DRAFTED	CHECKED
B	06/2026	FSD THIRD SUBMISSION	HYH	WWC
A	09/2025	FSD SECOND SUBMISSION	HYH	WWC
0	05/2025	FSD FIRST SUBMISSION	HYH	WWC

CLIENT:

NATION STAR DEVELOPMENT LIMITED
75/F, 8 Finance Street,
Central, Hong Kong

PROJECT ARCHITECT & AUTHORIZED PERSON:

RONALD LU & PARTNERS
呂元祥建築師事務所
33rd Floor, Wu Chung house, 213 Queen's Road East,
Wanchai, Hong Kong

STRUCTURAL/GEOTECHNICAL:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

BUILDING SERVICES ENGINEER:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

QUANTITY SURVEYOR:

ARCADIS
17/F, Two Harbour Square, 180 Wai Yip Street,
Kwun Tong, Kowloon
Hong Kong

FIRE SERVICES CONTRACTOR:

開創工程有限公司
GRAND CREATIVE ENGINEERS LIMITED

PROJECT:

PROPOSED DEVELOPMENT AT BAILEY STREET & WING KWONG STREET, TO KWA WAN, KOWLOON
INLAND LOT NO. 11279
(URA PROJECT KC-009)

TITLE:

SMOKE EXTRACTION SYSTEM-CALCULATION SUMMARY & ZONING PLAN

DATE: 06/2026	SCALE: NTS@A0		
DRAFTED: HYH	CHECKED: WWC	DESIGNED: HYH	REVIEWED: TKL
JOB NO. 2503373A	DRAWING NO. 2503373A/SES/003	REV. NO. B	